
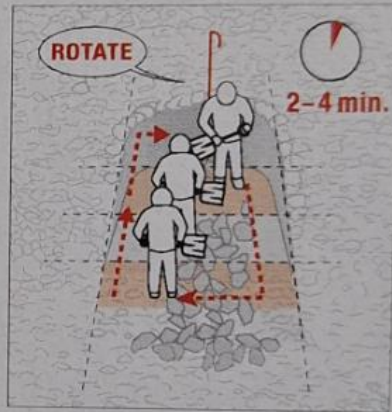
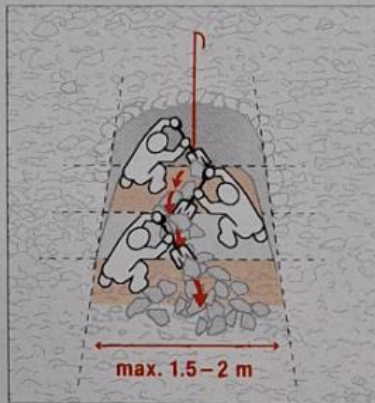


EXCAVATING

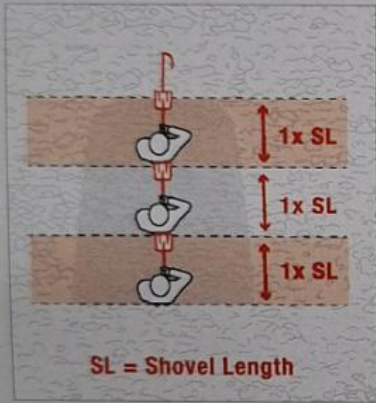

ADDITIONAL INFORMATION

Storage / Transport

+30°C / +86°F
-10°C / +14°F



Maintenance

Check the shovel lock regularly. It must not jam. The user must not mark, modify or repair the product.


The only exceptions are as follows: Cleaning or lubrication (lubricate the locking mechanism using a silicone-based lubricant).

In the event of warranty and repair claims, please send the product to Mammut.

Warning / Precaution of use



Cleaning



Drying



Life span

Service life	Approximate durability
Metal components	Unlimited
Plastic components	Max. 10 years